


# CLAPETS ANTI-RETOUR HYDRAULIQUE

HYDRAULIC NON-RETURN VALVE

**SERIE  
654**

**ACIER / STEEL - INOX / STAINLESS**

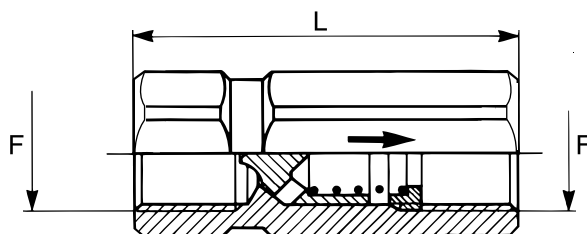

Taraudage - F BSPP BSPP internal thread	Taille DN/ISO	ACIER STEEL			Pression de service (bars) Working pressure (bars) STATIQUE	
		L	Hexagon	g	ACIER STEEL	INOX STAINLESS
1/4	6,3	50	19	79	700	400
3/8	10	60	22	130	600	400
1/2	12,5	70	27	200	500	400
3/4	16	86	35	420	500	400
1"	19	100	41	640	450	250
1"1/4	25	130	55	1570	300	200
1"1/2	31,5	135	65	2400	300	200
2"	40	150	75	3175	250	150

## ACIER

### CARACTERISTIQUES TECHNIQUES

- Pièces principales en acier zingué bichromaté : Hautes caractéristiques
- Raccordement BSPP, NPT, Métrique, autres sur demande
- Joints standards : Nitrile (de -30°C à 120°C)  
Viton®, EPDM, Téflon, autres sur demande
- Tarage standard : 0,5 et 1 bars – autres tarages sur demande.

## STEEL

### TECHNICAL DATA

- Main parts in bichromated zinc plated: High resistance
- Adaptors: BSPP, NPT, Metric thread, other on request
- Standard seals: Nitrile (from -30°C up to 120°C)  
Viton®, EPDM, Teflon, other on request
- Standard calibration: 0,5 and 1 bars cracking pressure – other spring loadings are available).

## INOX

### CARACTERISTIQUES TECHNIQUES

- Pièces principales en Inox AISI 316L
- Raccordement BSPP, NPT, Métrique, autres sur demande
- Joints standards : Viton® (de -25°C à 200°C)  
EPDM, Téflon, autres sur demande
- Tarage standard : 0,5 et 1 bars – autres tarages sur demande.

## STAINLESS

### TECHNICAL DATA

- Main parts AISI 316L Stainless-steel
- Adaptors: BSPP, NPT, Metric thread, other on request
- Standard seals: Viton® (from -25°C up to 200°C)  
EPDM, Teflon, other on request
- Standard calibration: 0,5 and 1 bars cracking pressure – other spring loadings are available).

Adaptation Size	Référence ACIER STEEL	Référence INOX STAINLESS
1/4	654010-000	654010-VZ0
3/8	654020-000	654020-VZ0
1/2	654030-000	654030-VZ0
3/4	654040-000	654040-VZ0
1"	654050-000	654050-VZ0
1"1/4	654060-000	654060-VZ0
1"1/2	654070-000	654070-VZ0
2"	654090-000	654090-VZ0